



PM STEPPING MOTOR MOD. 15BY20H04M

□ 接线图 COLOURS OF LEAD WIRES



□ 外形图 DIMENSIONS (unit=mm)

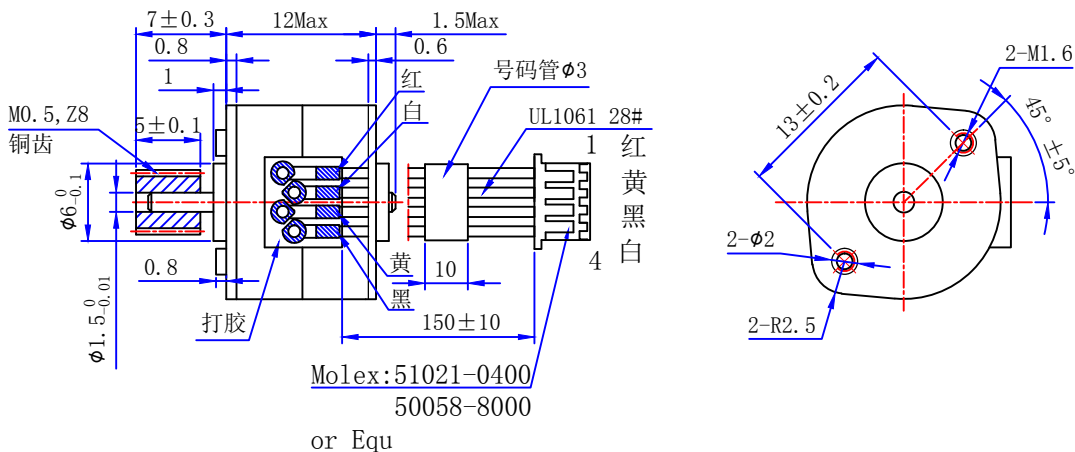

□ 性能参数 SPECIFICATIONS

相数	Phase	2	COMMENT 激光打标 □ 开关顺序图 SWITCHING SEQUENCE <table><tr><th>PIN STEP</th><th>A+</th><th>B+</th><th>A-</th><th>B-</th></tr><tr><td>1</td><td>+</td><td>+</td><td>-</td><td>-</td></tr><tr><td>2</td><td>-</td><td>+</td><td>+</td><td>-</td></tr><tr><td>3</td><td>-</td><td>-</td><td>+</td><td>+</td></tr><tr><td>4</td><td>+</td><td>-</td><td>-</td><td>+</td></tr></table> CW CCW VIEWED FROM MOUNTING SURFACE	PIN STEP	A+	B+	A-	B-	1	+	+	-	-	2	-	+	+	-	3	-	-	+	+	4	+	-	-	+
PIN STEP	A+	B+		A-	B-																							
1	+	+		-	-																							
2	-	+		+	-																							
3	-	-		+	+																							
4	+	-		-	+																							
步距角	Step Angle	18° /Step																										
驱动方式	Drive Mode	2-2 Bipolar																										
电压	Voltage	7.2 V																										
电流	Current	0.29 A/Phase																										
电阻	Resistance(20℃)	25±7% Ω/Phase																										
电感	Inductance	8±20% mH/Phase																										
保持转矩	Holding Torque	25 g.cm Min																										
定位转矩	Detent Torque	10 g.cm Max																										
起动频率	Pull-in Rate	920 pps Min																										
使用温度	Operation Temp.	-10~55℃																										
绝缘等级	Insulation Class	E																										
绝缘电阻	Insulation Resistance	DC 500V 100MΩ min																										
绝缘耐压	Dielectric Strength	AC 650V 1 SEC min																										
重量	Weight	35 g																										
寿命	Life	3000 h																										

旧底图总号						常州宝来电器有限公司 Baolai Electric Appliance		
底图总号								
更改标记	处数	签名	日期	备注	阶段标记	重量	比例	info@baolai-cn.com www.baolai-cn.com
设计	HQ	260303					2:1	物料编号
日期	签名							DZ-M03-033
审核			批准		共 1 张	第 1 张		

格式(1)

制图:

绘图:

幅面:4[#]