



# PM STEPPING MOTOR MOD. 25BY48H02

接线图 COLOURS OF LEAD WIRES





PULSE-TORQUE CHARACTERISTICS

LOADING TORQUE(g.cm)

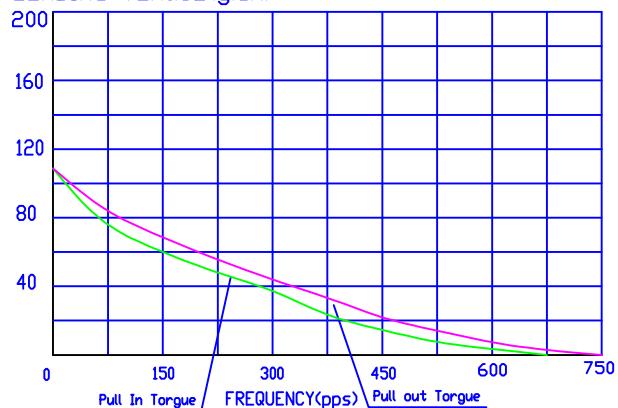

外形图 DIMENTIONS (unit=mm)

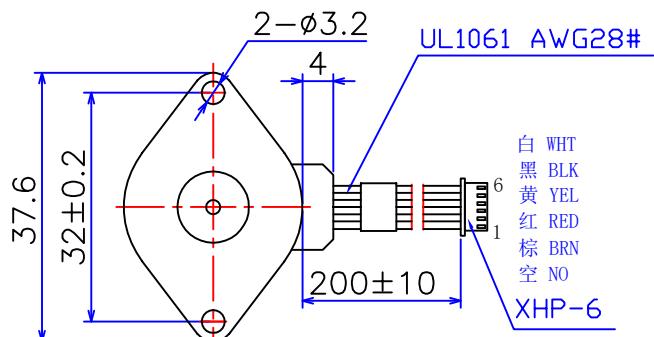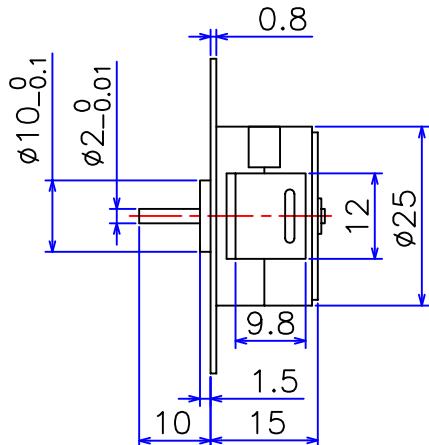

性能参数 SPECIFICATIONS

相数	Phase	4	COMMENT					
步矩角	Step Angle	7.5 ° /Step	开关顺序图 SWITCHING SEQUENCE					
驱动方式	Excitation	4-2 Unipolar						
电压	Voltage	12 V						
相电流	Current	0.24 A/Phase						
电阻	Resistance	50±7% ohm/Phase						
定位转矩	Detent Torque	45 g. cm Max						
保持转矩	Holding Torque	110 g. cm Min						
起动频率	Pull-in Rate	650 PPS Min						
绝缘等级	Insulation Class	E						
重量	Weight	40 g	VIEWED FROM MOUNTING SURFACE					

引线	红 RED	黑 BLK	黄 YEL	白 WHT	棕 BRN
STEP	-	-	-	-	+
1					
2					+
3				-	+
4	-			-	+

CCW

旧底图总号

底图总号

日期 签名

常州宝来电器有限公司

Baolai Electric Appliance

阶段标记

重量

比例

共 1 张 第 1 张

Tel:0519-88372126

Fax:0519-88372780