



HYBRID STEPPING MOTOR MOD. 35BYGH203

COLOURS OF LEAD WIRES



DIMENSIONS (unit=mm)

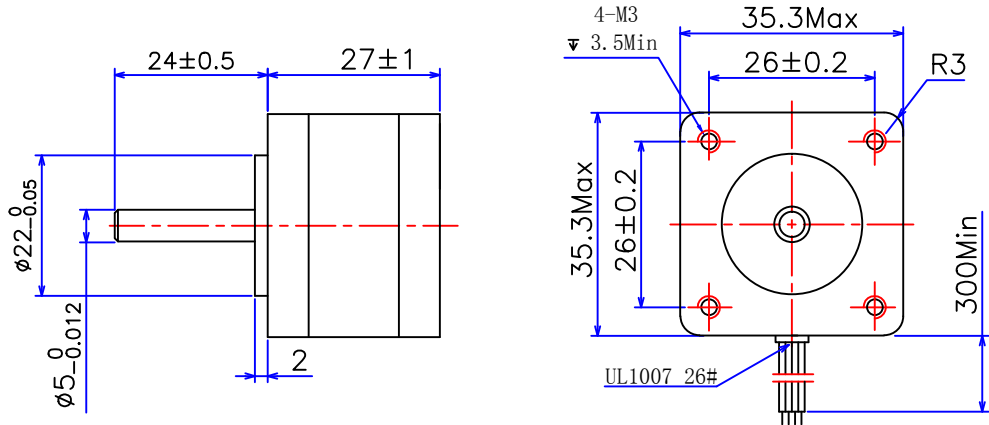

性能参数 SPECIFICATIONS

1	相数	Number of Phase	2	注释 COMMENT □ 开关顺序图 SWITCHING SEQUENCE 引线 STEP A+ B+ A- B- <table><tr><td>1</td><td>+</td><td>+</td><td>-</td><td>-</td></tr><tr><td>2</td><td>-</td><td>+</td><td>+</td><td>-</td></tr><tr><td>3</td><td>-</td><td>-</td><td>+</td><td>+</td></tr><tr><td>4</td><td>+</td><td>-</td><td>-</td><td>+</td></tr></table> VIEWED FROM MOUNTING SURFACE CW CCW	1	+	+	-	-	2	-	+	+	-	3	-	-	+	+	4	+	-	-	+
1	+	+	-		-																			
2	-	+	+		-																			
3	-	-	+		+																			
4	+	-	-		+																			
2	步距角	Step Angle	1.8 ° ±5%																					
3	电压	Voltage	3.5 V																					
4	电流	Current	1 A/Phase																					
5	相电阻	Resistance/Phase(20℃)	3.5±10% ohm/phase																					
6	相电感	Inductance/Phase	3.5±20% mH/phase																					
7	转子惯量	Rotor Inertia	10 g.cm²																					
8	定位转矩	Detent Torque	0.18Kg.cm Max																					
9	保持转矩	Holding Torque	1.25Kg.cm Min																					
10	绝缘电阻	Insulation Resistance	100MΩ 500VDC																					
11	绝缘等级	Insulation Class	Class B																					
12	环境温度	Ambient Temperature	-20℃~50℃																					
13	环境湿度	Ambient Humidity	15%~95%																					
14	重量	Weight	0.14 Kg ref																					
15	寿命	Life	6000h																					

旧底图总号						常州宝来电器有限公司 Baolai Electric Appliance		
底图总号								
更改标记		处数	更改文件号	签名	年月日	阶段标记	重量	比例
设计	HQ	260716						1:1
日期	签名							Tel:0519-88372126
		审核		批准		共 1 张	第 1 张	Fax:0519-88372780

格式(1)

制图

描图

幅面:4[#]