


Technical drawing of a mechanical component with the following dimensions:

- Overall length: 18.6_{Max}
- Distance from left face to start of thread: 15 ± 0.5
- Thread length: 1.5
- Distance from left face to start of thread (alternative dimension): $16_{-0.033}^0$
- Distance from left face to start of thread (alternative dimension): $5_{-0.05}^0$
- Distance from left face to start of thread (alternative dimension): 2
- Overall diameter: $\phi 36.5$

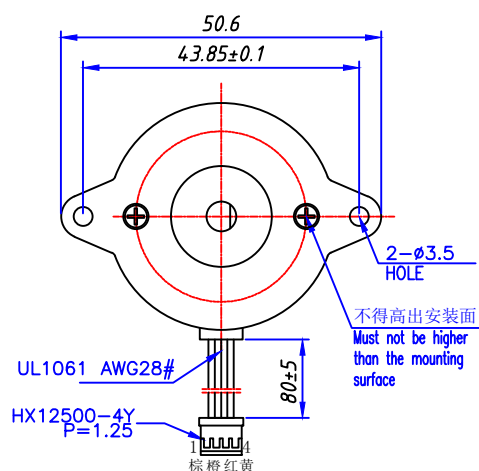

1	相数	Number of Phase	2	注释 COMMENT
2	步距角	Step Angle	0.9°	
3	电压	Voltage	8.2 V	
4	电流	Current	0.3 A/Phase	
5	相电阻	Resistance/Phase (20℃)	27.2±10% ohm/phase	
6	相电感	Inductance/Phase	20.7±20% mH/phase	
7	保持转矩	Holding Torque	10N.cm Min	
8	绝缘电阻	Insulation Resistance	100MΩ 500VDC	
9	绝缘等级	Insulation Class	Class B	
10	环境温度	Ambient Temperature	-20℃~50℃	
11	环境湿度	Ambient Humidity	15%~95%	
12	重量	Weight	90 g ref	
13	寿命	Life	6000h	

										技术规格书			常州宝来电器有限公司 Baolai Electric Appliance		
旧底图总号															
底图总号		标记		处数		分区		更改文件号		签名		年.月.日		Tel:0519-88372126 Fax:0519-88372780	
		设计		WN		221021		标准化						阶段标记 重量 比例	
日期		签名												info@baolai-cn.com www.baolai-cn.com	
		审核												1:1	
		工艺						批准						共 1 张 第 1 张	

幅面: 4[#]