



HYBRID STEPPING MOTOR MOD. 42BYGH323

COLOURS OF LEAD WIRES



DIMENSIONS (unit=mm)

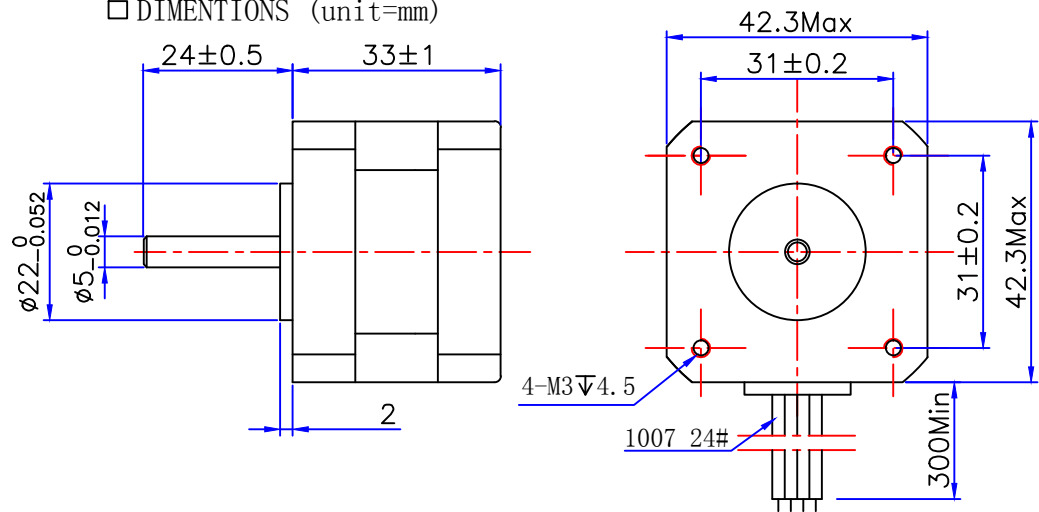

性能参数 SPECIFICATIONS

1	相数	Number of Phase	2	注释 COMMENT □ 开关顺序图 SWITCHING SEQUENCE 引线 STEP <table><tr><th>A+</th><th>B+</th><th>A-</th><th>B-</th></tr><tr><td>+</td><td>+</td><td>-</td><td>-</td></tr><tr><td>-</td><td>+</td><td>+</td><td>-</td></tr><tr><td>-</td><td>-</td><td>+</td><td>+</td></tr><tr><td>+</td><td>-</td><td>-</td><td>+</td></tr></table> CW CCW VIEWED FROM MOUNTING SURFACE	A+	B+	A-	B-	+	+	-	-	-	+	+	-	-	-	+	+	+	-	-	+
A+	B+	A-	B-																					
+	+	-	-																					
-	+	+	-																					
-	-	+	+																					
+	-	-	+																					
2	步距角	Step Angle	1.8 ° ±5%																					
3	电压	Voltage	12 V																					
4	电流	Current	0.4 A/Phase																					
5	相电阻	Resistance/Phase (20℃)	30±10% ohm/phase																					
6	相电感	Inductance/Phase	35±20% mH/phase																					
7	转子惯量	Rotor Inertia	24g. cm²																					
8	定位转矩	Detent Torque	0.2 Kg. cm Max																					
9	保持转矩	Holding Torque	2.5 Kg. cm Min																					
10	绝缘电阻	Insulation Resistance	100MΩ 500VDC																					
11	绝缘等级	Insulation Class	B, 130℃																					
12	环境温度	Ambient Temperature	-20℃~50℃																					
13	环境湿度	Ambient Humidity	15%~95%																					
14	重量	Weight	0.2 Kg																					
15	寿命	Life	6000h																					

旧底图总号						技术规格书			常州宝来电器有限公司 Baolai Electric Appliance	
底图总号									Tel:0519-88372126 Fax:0519-88372780	
日期	签名	更改标记	处数	更改文件号	签名	年月日	阶段标记	重量	比例	
		设计	HQ	260716					1:1	
		审核			批准		共 1 张	第 1 张		

格式 (1)

制图:

描图:

幅面: 4[#]