



□ COLOURS OF LEAD WIRES

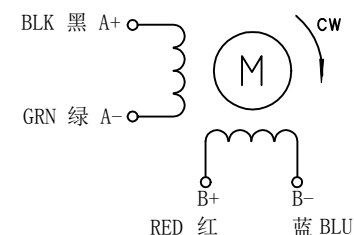

□ DIMENSIONS (unit=mm)

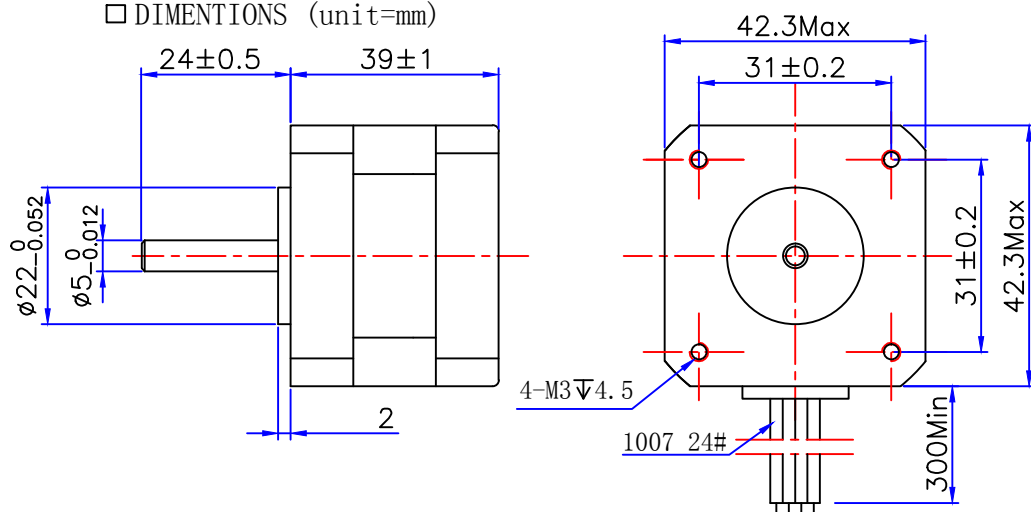

性能参数 SPECIFICATIONS

1	相数	Number of Phase	2	注释 COMMENT □ 开关顺序图 SWITCHING SEQUENCE 引 线 STEP 1 2 3 4 A+ B+ A- B- + + - - - + + - - - + + + - - + CW CCW VIEWED FROM MOUNTING SURFACE
2	步距角	Step Angle	1.8 ° ±5%	
3	电压	Voltage	6 V	
4	电流	Current	1 A/Phase	
5	相电阻	Resistance/Phase(20℃)	6±10% ohm/phase	
6	相电感	Inductance/Phase	12±20% mH/phase	
7	转子惯量	Rotor Inertia	32 g.cm ²	
8	定位转矩	Detent Torque	0.22 Kg.cm Max	
9	保持转矩	Holding Torque	3.2 Kg.cm Min	
10	绝缘电阻	Insulation Resistance	100MΩ 500VDC	
11	绝缘等级	Insulation Class	B, 130℃	
12	环境温度	Ambient Temperature	-20℃~50℃	
13	环境湿度	Ambient Humidity	15%~95%	
14	重量	Weight	0.26 Kg	
15	寿命	Life	6000h	

										技术规格书			常州宝来电器有限公司 Baolai Electric Appliance						
旧底图总号															Tel:0519-88372126 Fax:0519-88372780				
底图总号		更改标记		处数		更改文件号		签名		年月日		阶段标记		重量		比例			
		设计	HQ	260716													1:1		
日期	签名																		
		审核				批准						共	1	张	第	1	张		

格式 (1)

制图：

描图:

幅面: 4[#]