



Linear Stepping Motor MOD. ZX35BY48H02-L0.6



☐ 接线图 COLOURS OF LEAD WIRES

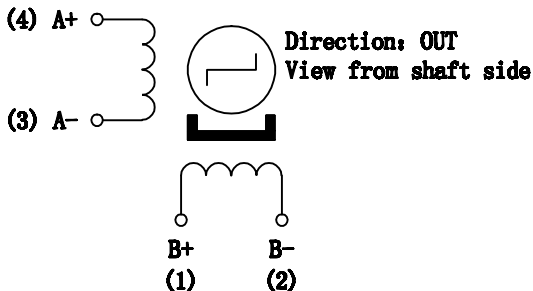


□ 外形图 DIMENSIONS (unit=mm)

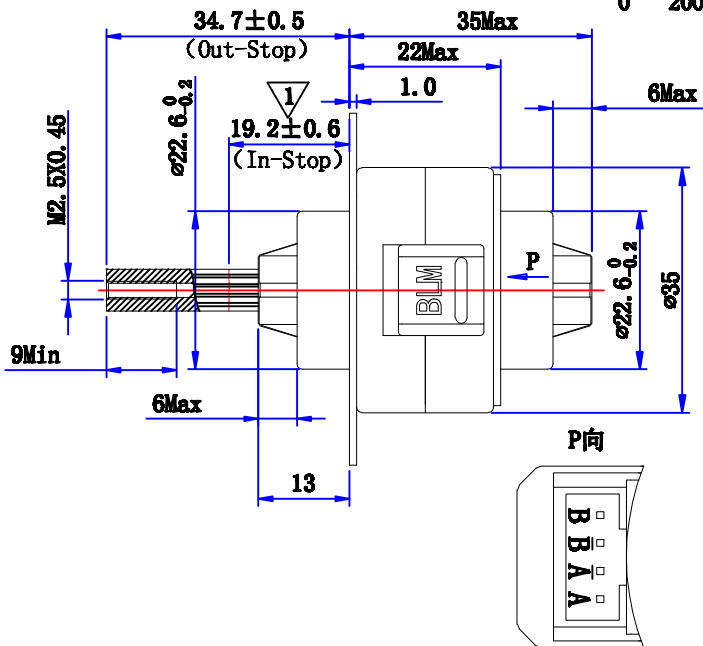

☐ FREQUENCY-THRUST CHARACTERISTICS

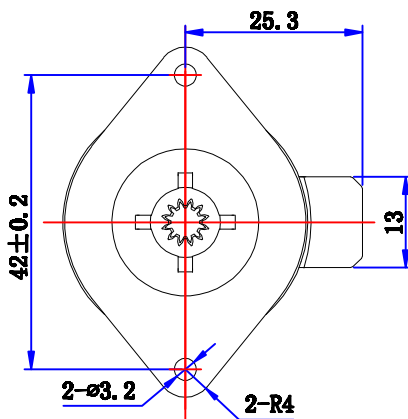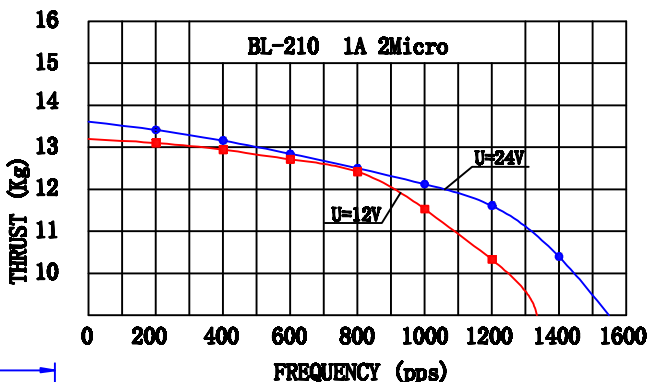

性能参数 SPECIFICATIONS

相数	Phase	2	COMMENT Shaft: 
步距角	Step Angle	7.5° /Step	
驱动方式	Drive Mode	Bipolar, Constant A chopper drive	
步长	Travel/step	12.7±7 μm	
推力	Thrust	12Kg at 100 pps(24V 1A 2Micro) 	
行程	Stroke	15.5±1.1 mm 	
电压	Voltage	12-24 V 	
电流	Current	1 A/Phase 	
电阻	Resistance(20℃)	3.5±10% Ω/Phase	
电感	Inductance	4.2±20 mH/Phase	
使用温度	Operation Temp.	-20~55℃	
绝缘等级	Insulation Class	E	
绝缘电阻	Insulation Resistance	DC 500V 100MΩ min	
绝缘耐压	Dielectric Strength	AC 650V 1 SEC min	
重量	Weight	约120 g	

常州宝来电器有限公司
Baolai Electric Appliance

info@baolai-cn.com
www.baolai-cn.com

1:1

共 1 张 第 1 张